



TRUWOOD DESIGNER SHAKE® LAP SIDING

Your house is more than just a pretty face. With TruWood, you can give it a Tru personality. TruWood Designer Shake[®] 1/2 in Lap Siding offers irresistible style, authentic real wood appearance and numerous design options at significant savings over cedar. Available in 8 ft lengths, TruWood Designer Shake is also much easier to install than the traditional "one shingle at a time" method, for ease and convenience. Add a distinctive accent. Create architectural appeal and long-lasting quality. Make your house a home with Tru appeal.


FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- Easy to handle 8 ft lengths
- Matching reversible TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family, multi-family housing, remodeling and light commercial projects
- Easy and safe to install using normal woodworking tools. No silica dust.
- Ask us about our FSC[®] products



- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets



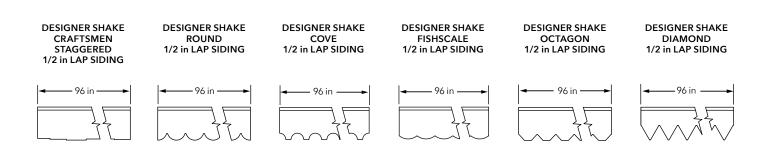

SPECIFICATIONS:

Lap Size	Pc/ Unit	Maximum Exposure in inches	Sq. Ft. Coverage Per Piece	Approx Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq Ft. of Wall Area	Approx. Weight Lbs./Unit
ROUND 1/2 in x 9-1/2 in x 8 ft	90	6-3/4	4.5	385	1478	1161
FISHSCALE 1/2 in x 9-1/2 in x 8 ft	90	7-1/2	5	428	1330	1077
OCTAGON 1/2 in x 9-1/2 in x 8 ft	90	6-3/4	4.5	385	1478	1071
COVE 1/2 in x 9-1/2 in x 8 ft	90	6-1/2	4.33	370	1535	1077
DIAMOND 1/2 in x 9-1/2 in x 8 ft	90	4-1/4	2.83	242	2437	950
CRAFTSMEN STAGGERED 1/2 in x 9-1/2 in x 8 ft	90	8	5.33	456	1247	1077

TruWood Siding and Trim meet the requirements of the following:

2018 International Building Code 2018 International Residential Code ICC ESR-2588 Federal Manufactured Housing Standards American National Standard ANSI-CPA 135.6 - 2012 California Wildland-Urban Interface (WUI)

Fire rating = Class C R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU 1/2 in Lap Siding = No Shear Value

CAL. PROP 65 WARNING: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

TO FIND YOUR NEAREST DISTRIBUTOR, WARRANTY INFORMATION, INSTALLATION INSTRUCTIONS, CARE AND MAINTENANCE INSTRUCTIONS, A SIDING CALCULATOR, OR TO VIEW OUR PRODUCTS ON SAMPLE HOMES USING OUR VISUALIZER TOOL, HEAD TO **TruWoodSiding.com.** CAN'T FIND WHAT YOU NEED? **800.417.3674**

